





## Optima<sup>deluxe</sup>

<b>Nominal power min/max:</b>	7 kW/8 kW
<b>Weight:</b>	~1256 lbs (with aircon)
<b>Bench pane:</b>	330 lbs (max. load capacity)
<b>Electrical requirements</b>	
<b>Power connection:</b>	rear side left
<b>Protective class:</b>	IP20
<b>Mains voltage:</b>	400V / ~3N / 50Hz
<b>Wire cross section:</b>	5 x 4 mm <sup>2</sup> Ölflex
<b>Fuses:</b>	Automatic fuse K-type (safety cut-out), 3-pole (3 x 16A) with residual current-operated circuit breaker (RCD)
<b>Air discharge</b>	
<b>Fan:</b>	Exhaust-air socket Ø 300 - Height to top 1800 mm (With and without hot air recirculation)
<b>Minimum exhaust air flow rate:</b>	2250 m <sup>3</sup> /h
<b>Exhaust-air hose:</b>	Ø 300
<b>Dimensions</b>	
(Height x width x depth) in mm:	1480 x 2330 x 1610 (closed) 1800 x 2330 x 1440 (open)

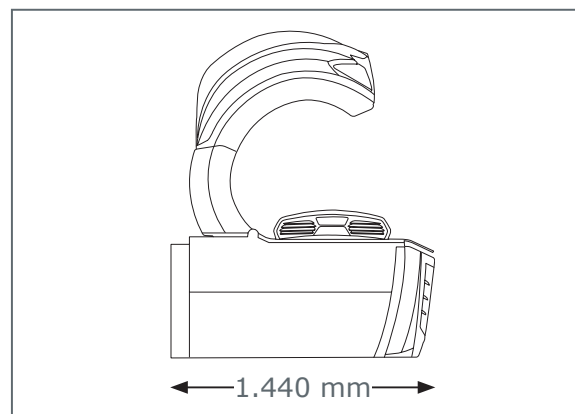

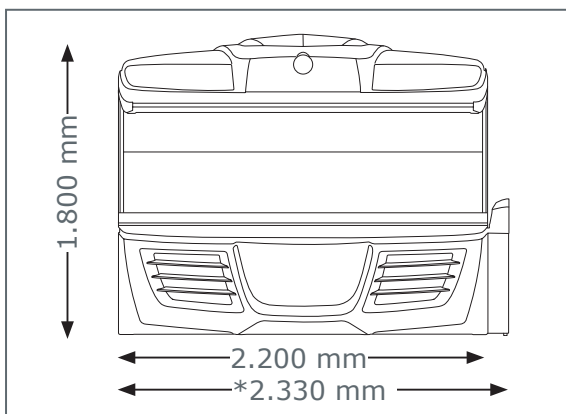

Optima  $\alpha$  deluxe 

<b>Nominal power min/max:</b>	10 kW/11 kW
<b>Weight:</b>	~1367 lbs (with aircon)
<b>Bench pane:</b>	330 lbs (max. load capacity)
<b>Electrical requirements</b>	
<b>Power connection:</b>	rear side left
<b>Protective class:</b>	IP20
<b>Mains voltage:</b>	400V / ~3N / 50Hz
<b>Wire cross section:</b>	5 x 4 mm <sup>2</sup> Ölflex
<b>Fuses:</b>	Automatic fuse K-type (safety cut-out), 3-pole (3 x 25A) with residual current-operated circuit breaker (RCD)
<b>Air discharge</b>	
<b>Fan:</b>	Exhaust-air socket Ø 300 - Height to top 2095 mm (With and without hot air recirculation)
<b>Minimum exhaust air flow rate:</b>	2250 m <sup>3</sup> /h
<b>Exhaust-air hose:</b>	Ø 300
<b>Dimensions</b>	
(Height x width x depth) in mm:	1534 x 2380 x 1430 (closed) 1942 x 2380 x 1430 (open)

